SLD - HRC FUSE SWITCH 12WAY LT FEEDER PILLAR BOX

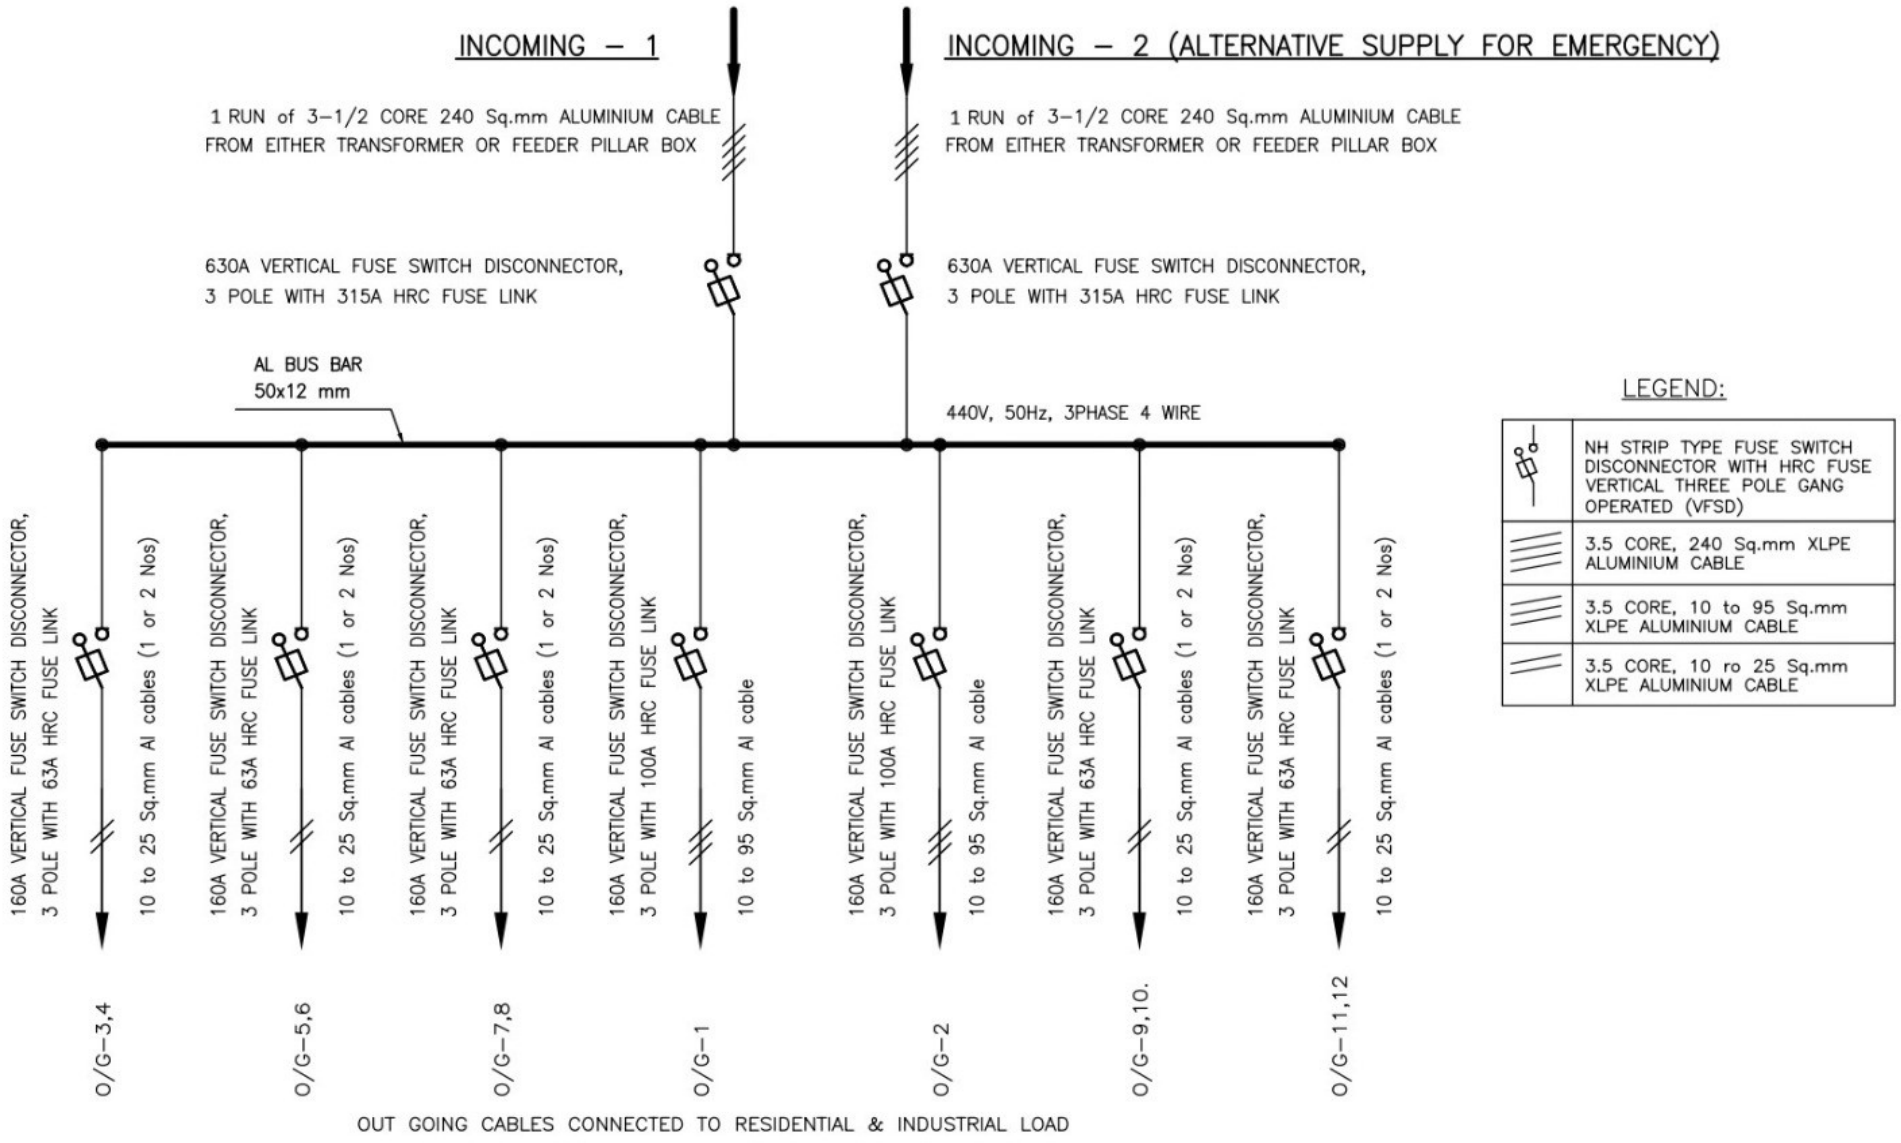
INCOMING – 1
INCOMING – 2 (ALTERNATIVE SUPPLY FOR EMERGENCY)
1 RUN of 3–1/2 CORE 240 Sq.mm ALUMINIUM CABLE FROM EITHER TRANSFORMER OR FEEDER PILLAR BOX
1 RUN of 3–1/2 CORE 240 Sq.mm ALUMINIUM CABLE FROM EITHER TRANSFORMER OR FEEDER PILLAR BOX
630A VERTICAL FUSE SWITCH DISCONNECTOR, 3 POLE WITH 315A HRC FUSE LINK
630A VERTICAL FUSE SWITCH DISCONNECTOR, 3 POLE WITH 315A HRC FUSE LINK
AL BUS BAR 50x12 mm
440V, 50Hz, 3PHASE 4 WIRE
160A VERTICAL FUSE SWITCH DISCONNECTOR, 3 POLE WITH 63A HRC FUSE LINK
10 to 25 Sq.mm Al cables (1 or 2 Nos)
160A VERTICAL FUSE SWITCH DISCONNECTOR, 3 POLE WITH 63A HRC FUSE LINK
10 to 25 Sq.mm Al cables (1 or 2 Nos)
160A VERTICAL FUSE SWITCH DISCONNECTOR, 3 POLE WITH 63A HRC FUSE LINK
10 to 25 Sq.mm Al cables (1 or 2 Nos)
160A VERTICAL FUSE SWITCH DISCONNECTOR, 3 POLE WITH 100A HRC FUSE LINK
10 to 95 Sq.mm Al cable
160A VERTICAL FUSE SWITCH DISCONNECTOR, 3 POLE WITH 100A HRC FUSE LINK
10 to 95 Sq.mm Al cable
160A VERTICAL FUSE SWITCH DISCONNECTOR, 3 POLE WITH 63A HRC FUSE LINK
10 to 25 Sq.mm Al cables (1 or 2 Nos)
160A VERTICAL FUSE SWITCH DISCONNECTOR, 3 POLE WITH 63A HRC FUSE LINK
10 to 25 Sq.mm Al cables (1 or 2 Nos)
O/G–3,4
O/G–5,6
O/G–7,8
O/G–1
O/G–2
O/G–9,10.
O/G–11,12
OUT GOING CABLES CONNECTED TO RESIDENTIAL & INDUSTRIAL LOAD
LEGEND:
NH STRIP TYPE FUSE SWITCH DISCONNECTOR WITH HRC FUSE VERTICAL THREE POLE GANG OPERATED (VFSD)
3.5 CORE, 240 Sq.mm XLPE ALUMINIUM CABLE
3.5 CORE, 10 to 95 Sq.mm XLPE ALUMINIUM CABLE
3.5 CORE, 10 ro 25 Sq.mm XLPE ALUMINIUM CABLE